




Westeel Door #1

BDI-9261 + BDI-9283

Westeel door #1 is a three piece which has a round chute that slides in. This door requires a converter (BDI-9283) in order to use the bin door insert (BDI-9261).

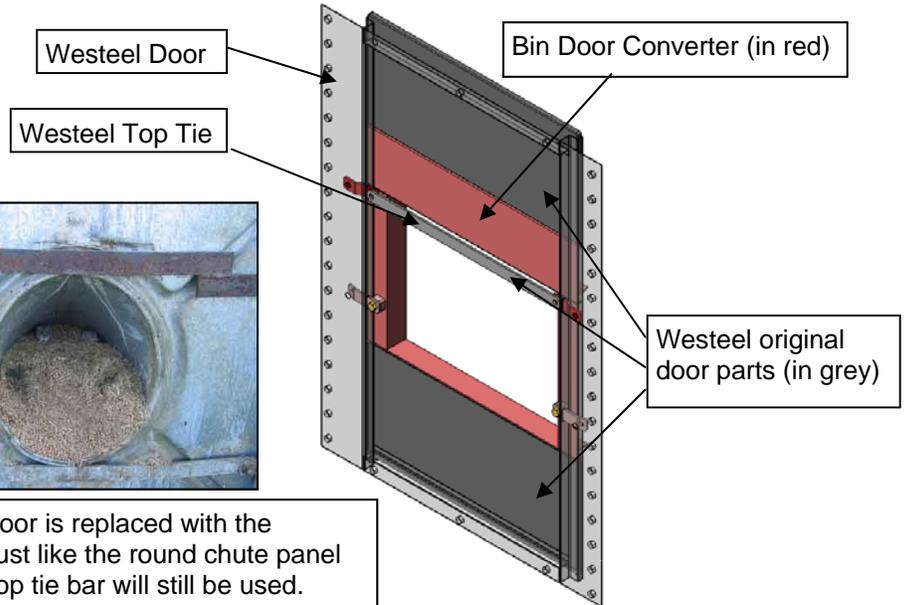



The round chute panel that came with the door is replaced with the converter. The converter slides into place just like the round chute panel did and the BDI fits to the converter. The top tie bar will still be used.

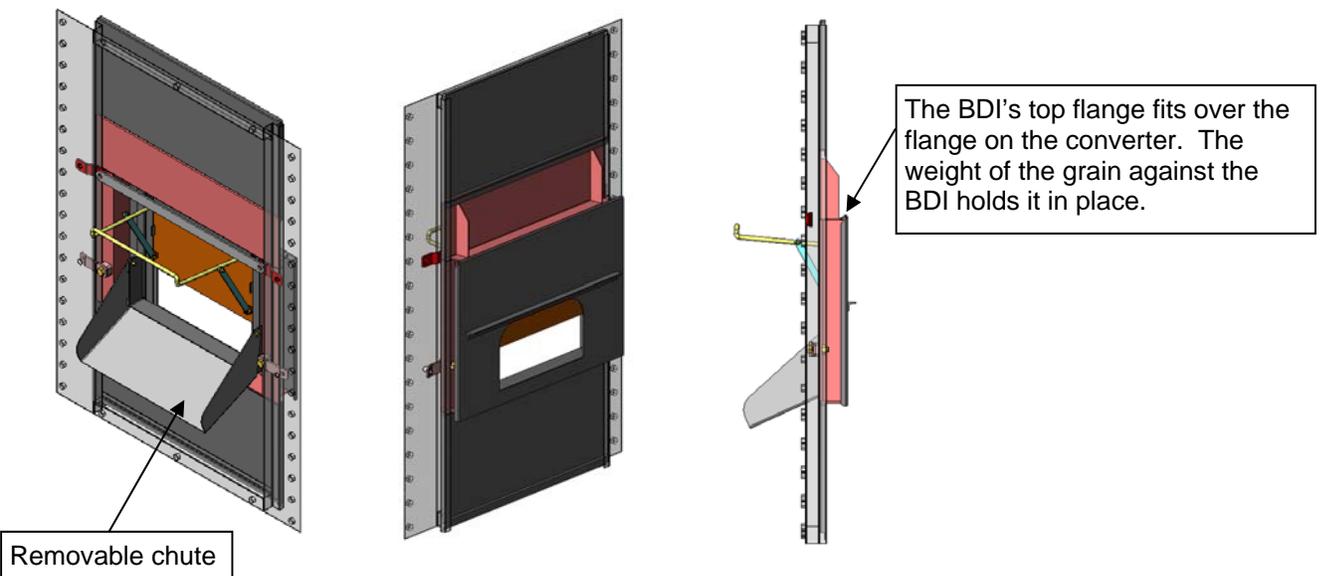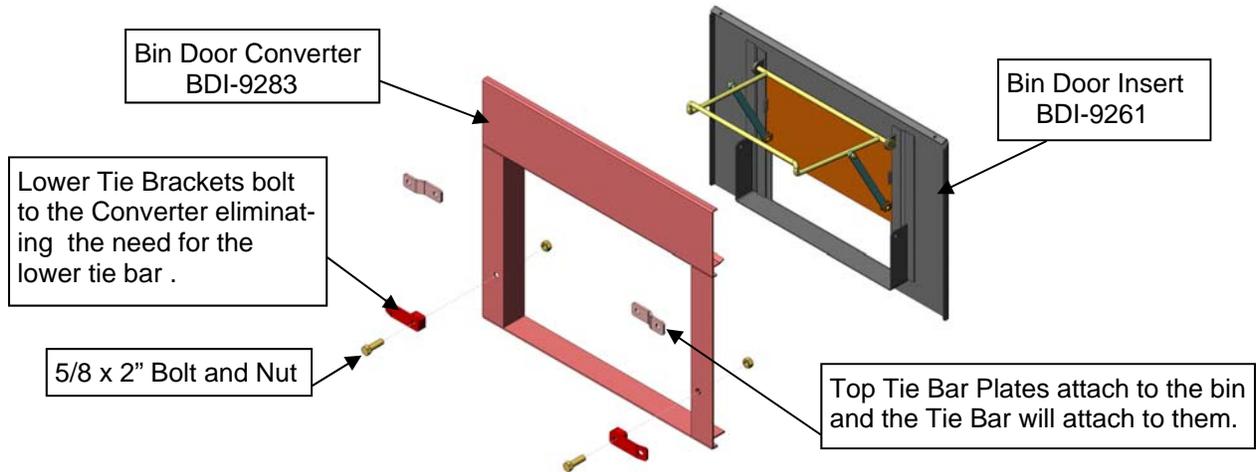

Westeel Door #2

BDI-9261 + BDI-9284

Westeel door #2 has a bolt-in center bar and bolt on side panels to the chute. The bolt on side panels will need to be removed and replaced with the 2 angle brackets as shown. The Bin Door Insert will then fit over the flange of the center bar and the weight of the grain will hold it in place.

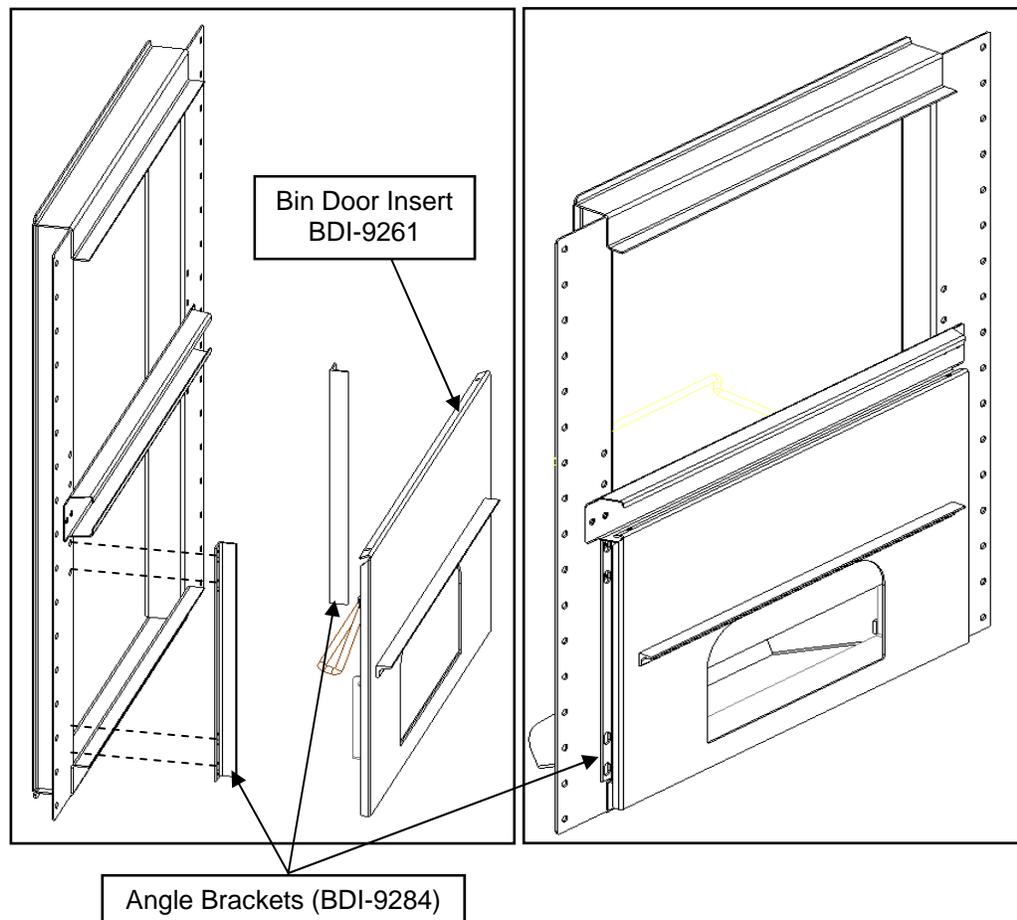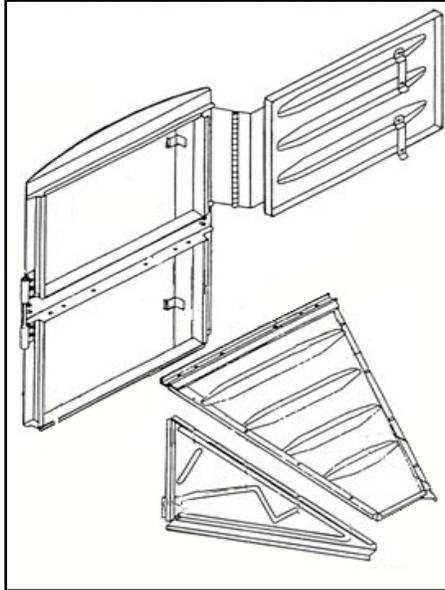

Westeel Door #3

BDI-9261 + Fasteners

Westeel door #3 has a swing-in center bar.
To install the Bin Door Insert: Remove the 4 bolts which holds the auger port to the door. Using three of the existing bolts fill in the 2 outside holes and an inside hole. Then place the insert into the door opening with the chute flange resting on the door sill. With a pencil draw a mark through the center of the open bolt hole (4th hole) on the front face of the bin door insert. Remove the insert from the door and drill a 7/16" hole at the marked location. Reinstall the insert and using the enclosed 3/8 x 2" bolt secure the insert to the door's center bar.



Swing-In Center Bar



Open bolt hole in center bar



Attach with 3/8 x 2" bolt and nut enclosed

Bolt Package

- 1- 3/8 x 2" Hex Bolt
- 1- 3/8" Regular Nut

